


Thermally separated ceiling connector

Reinforced concrete slab with superstructure, cantilevered Double-wall masonry

Detailed view above door | under window with blinds



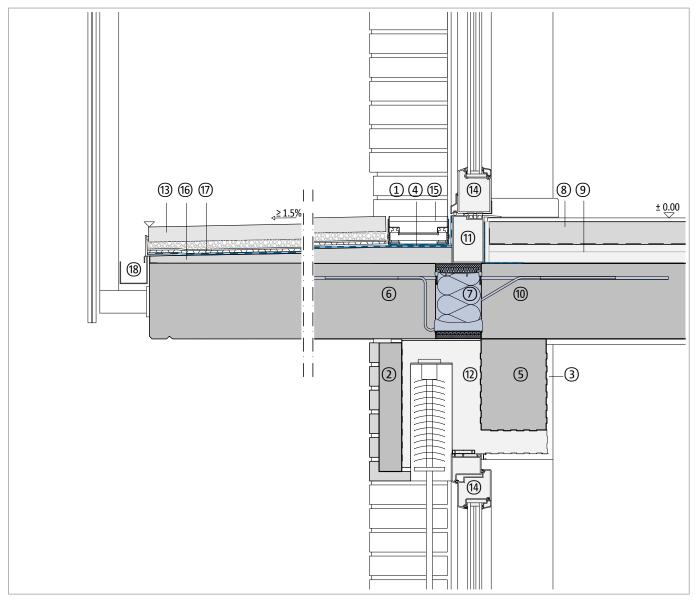

	Component, example
1	Exposed brickwork, clinker
2	Reinforced concrete lintel
3	Interior plaster
4	Insulation
(5)	Reinforced concrete lintel, concrete clinker
6	Reinforced concrete slab
7	Schöck Isokorb® XT type K
8	Floor covering, floating screed
9	Impact sound and thermal insulation

	Component, example
100	Reinforced concrete ceiling
11)	Threshold, thermally insulated
12)	Blinds, thermally insulated box
(13)	Slab in gravel bed
14)	Window element, door element
15)	Facade channel
16	Sloping wedge (e.g., bonded screed)
17)	Drain mat with fleece
18)	Edge finish: Channel, gravel trap, inlet plate

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.