


Thermally separated ceiling connector

Precast reinforced concrete balcony, supported Monolithic masonry
Detailed view above door | below window

DCIK 10.02-TF | M 1 : 10

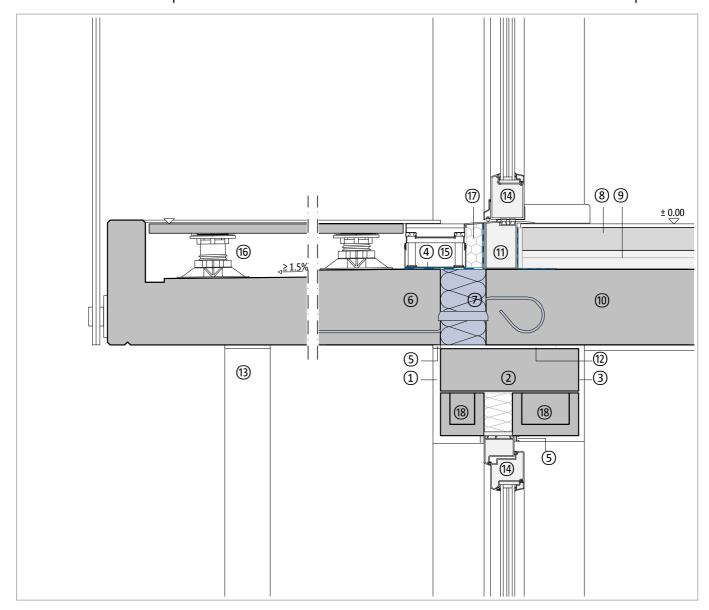

	Component, example
1	Exterior plaster
2	Masonry wall (e.g., insulating bricks)
3	Interior plaster
4	Insulation
(5)	Plastering profile or elastic connector
6	Precast reinforced concrete, waterproof concrete
7	Schöck Isokorb® XT type Q
8	Floor covering, floating screed
9	Impact sound and thermal insulation

	Component, example	
10	Reinforced concrete ceiling	
11)	Threshold, thermally insulated	
12)	Bitumen sheet R500, sanded	
13)	Support, steel or reinforced concrete	
14)	Window element, door element	
15)	Facade channel	
16)	Slab with support system	
17)	Thermal insulation, non-slip (XPS)	
18)	Brick lintel, thermally separated	

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.