


Thermally separated ceiling connector

Precast reinforced concrete balcony, supported

Wall with rear-ventilated facade (RVF)

Detailed view above wall | below wall

DCIK 11-01-WW | M 1 : 10

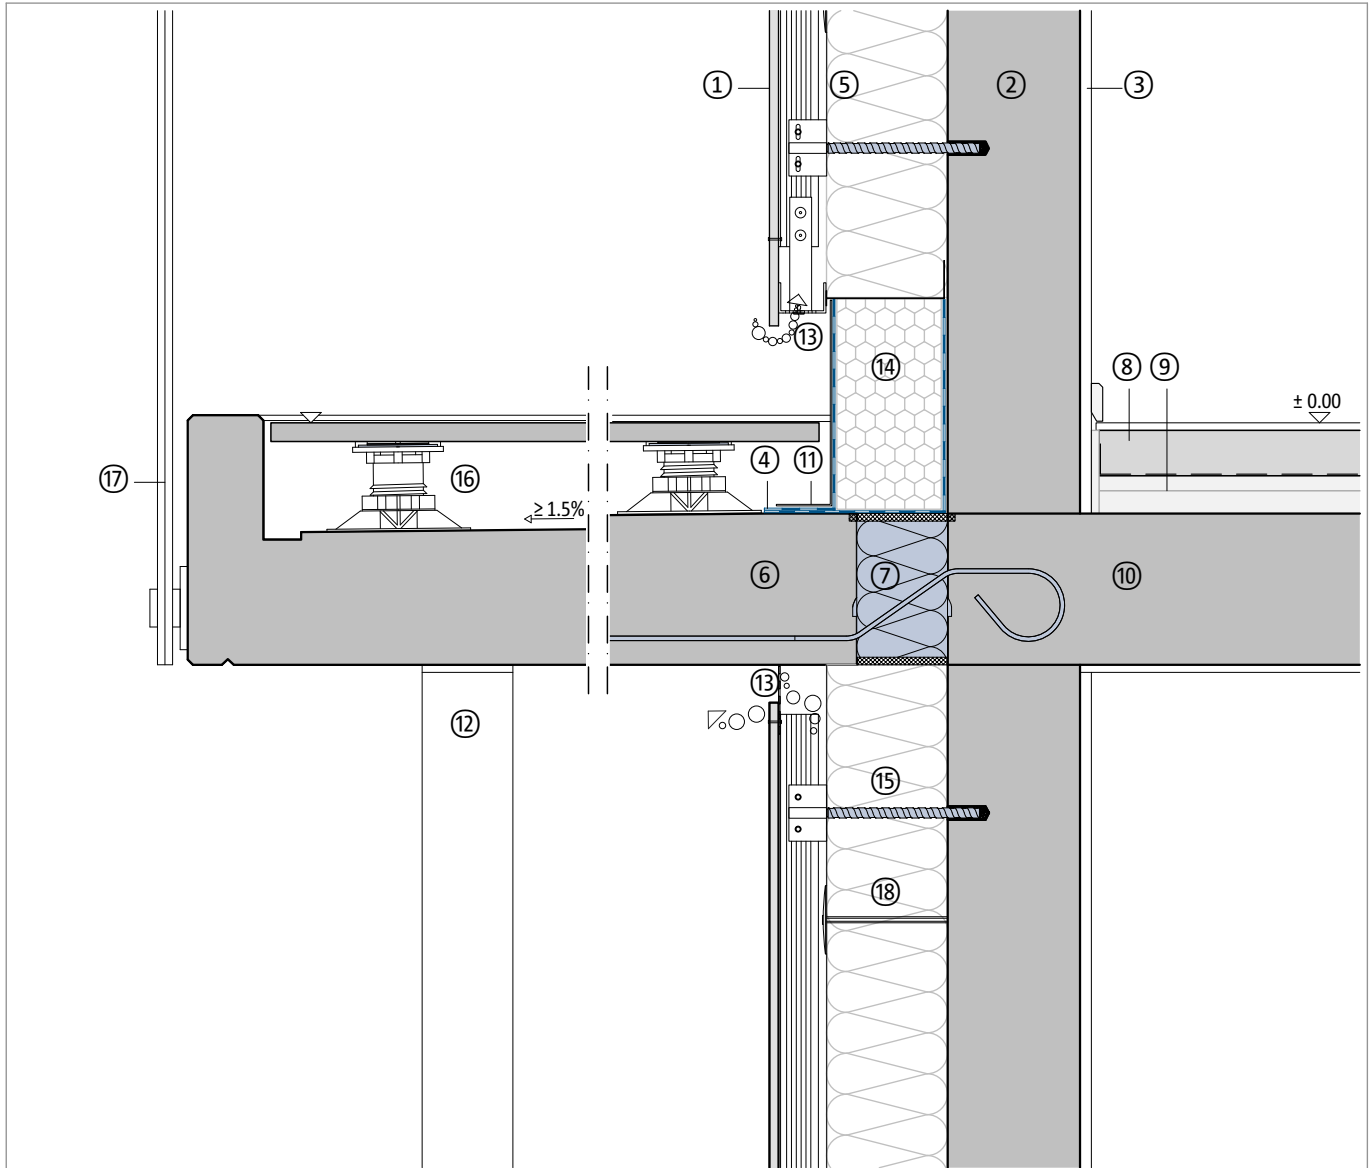

Component, example	
①	Rear-ventilated facade (RVF)
②	Masonry wall or reinforced concrete wall
③	Interior plaster
④	Insulation
⑤	Mineral wool insulation
⑥	Precast reinforced concrete, waterproof concrete
⑦	Schöck Isokorb® XT type Q
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Aluminum sheet, edged
⑫	Support, steel or reinforced concrete
⑬	Rear ventilation
⑭	Base insulation, XPS
⑮	Schöck Isolink® type F-S1
⑯	Slab with support system
⑰	Railing
⑱	Insulation holder

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.