


Thermally separated ceiling connector

Prefabricated reinforced concrete canopy, downward height offset

Exterior wall with thermal insulation composite system

Detailed view above wall | below door

DCIK 21-03-WT | M 1 : 10

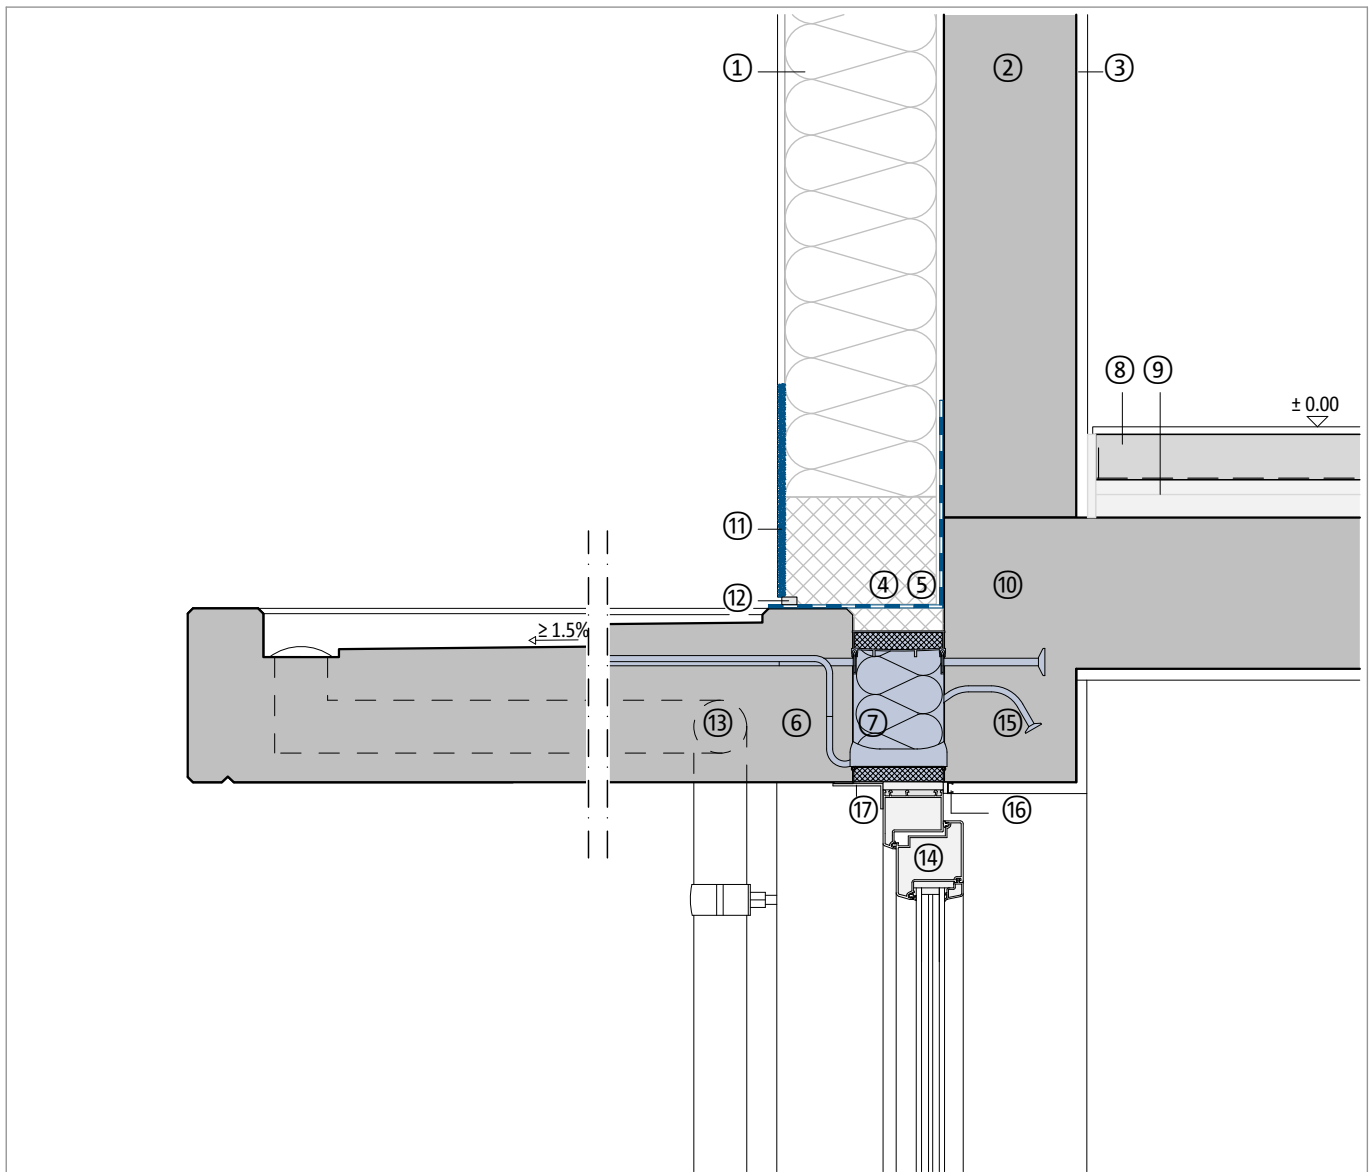

Component, example	
①	Thermal insulation composite system
②	Masonry wall or reinforced concrete wall
③	Interior plaster
④	Insulation
⑤	Base insulation, XPS
⑥	Precast reinforced concrete, waterproof concrete
⑦	Schöck Isokorb® XT type K-O
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Moisture protection
⑫	Plastering profile, joint sealing tape
⑬	Drainage
⑭	Window element, door element
⑮	Reinforced concrete non-pre-stressed girder, based on statics
⑯	Plastering profile or elastic connector
⑰	Cover angle, aluminum

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.