


Thermally separated ceiling connector

Precast reinforced concrete canopy, cantilevered Monolithic masonry Detailed view above wall | below door

DCIK 23-02-WT | M 1 : 10

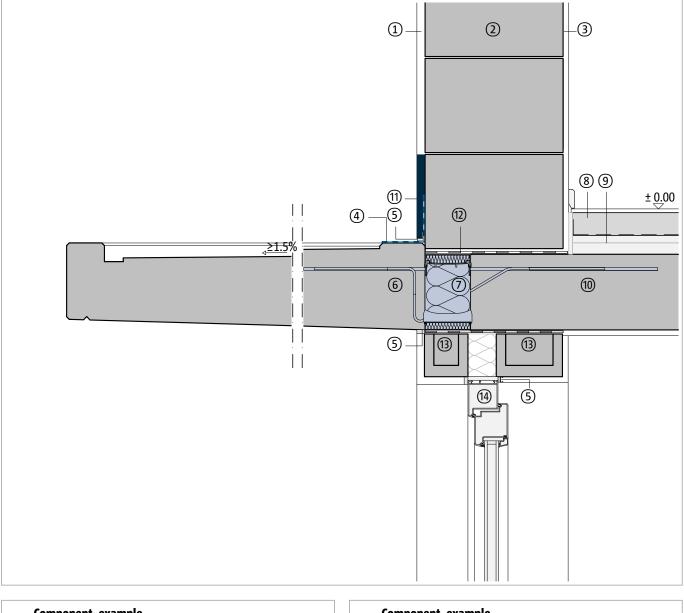

Component, example			Component, example	
1	Exterior plaster	10	Reinforced concrete ceiling	
2	Masonry wall (e.g., insulating bricks)	(11)	Moisture protection	
3	Interior plaster	(12)	Bitumen sheet R500, sanded	
4	Insulation	(13)	Brick lintel, thermally separated	
5	Plastering profile or elastic connector	(14)	Window element, door element	
6	Precast reinforced concrete, waterproof concrete			
\bigcirc	Schöck Isokorb® XT type K			
8	Floor covering, floating screed			
9	Impact sound and thermal insulation			

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.