


Thermally separated ceiling connector

Steel balcony, cantilevered

Monolithic masonry

Detailed view above door | under window with blinds

DCIK 29-04-TFJ | M 1:10

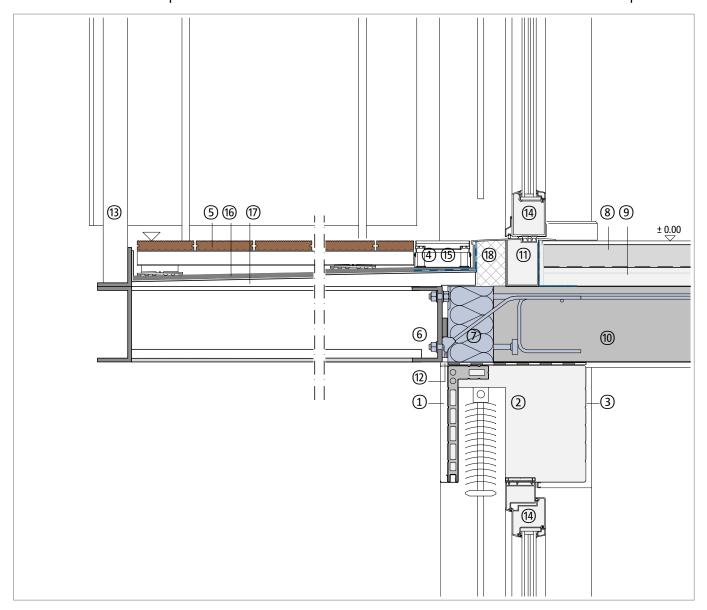

	Component, example
1	Exterior plaster
2	Blinds, thermally insulated box
3	Interior plaster
4	Insulation
(5)	Drain mat, optional
6	Head plate with cleat
7	Schöck Isokorb® XT type SK
8	Floor covering, floating screed
9	Impact sound and thermal insulation

	Component, example
100	Reinforced concrete ceiling
111	Threshold, thermally insulated
12)	Plastering profile or elastic joint
(13)	Railing
14)	Window element, door element
15)	Facade channel
16	Wooden floorboards, substructure, support system
17)	Sloped aluminum tray
18)	Thermal insulation, pressure-resistant (XPS)

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.