


Thermally separated ceiling connector

Steel canopy, cantilevered

Wall with rear-ventilated facade (RVF)

Detailed view above wall | below door

DCIK 36-02-WT | M 1 : 10

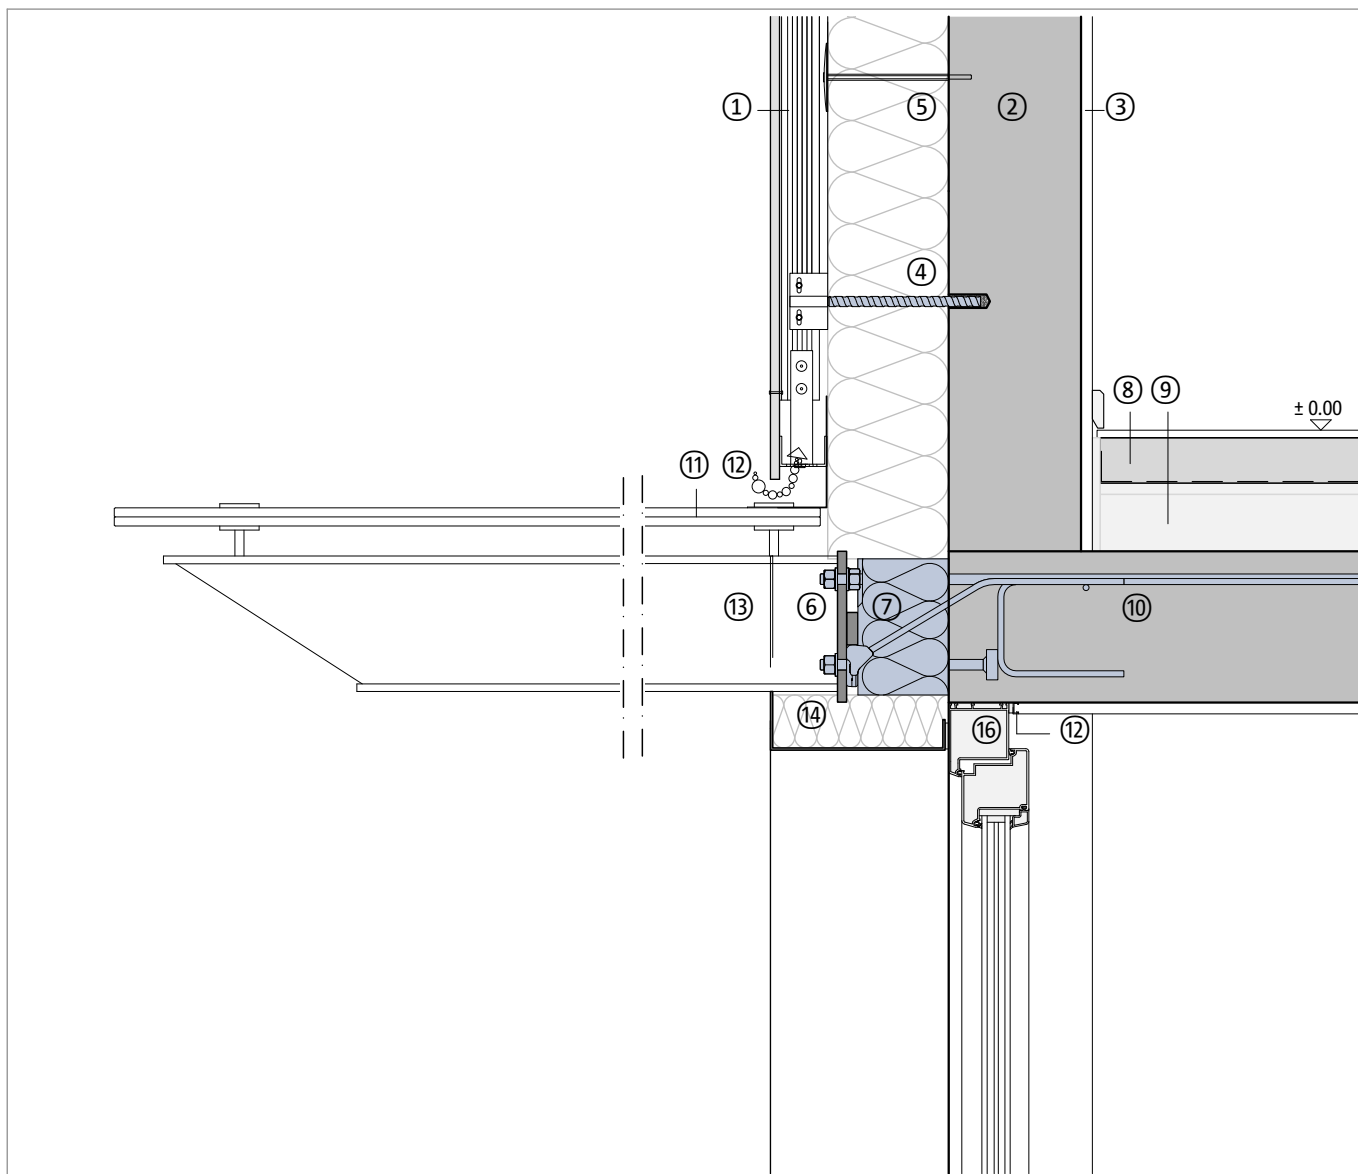

Component, example	
①	Rear-ventilated facade (RVF)
②	Masonry wall or reinforced concrete wall
③	Interior plaster
④	Schöck Isolink® type F-S1
⑤	Thermal insulation, mineral wool
⑥	Head plate with cleat
⑦	Schöck Isokorb® XT type SK
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Laminated safety glass
⑫	Rear ventilation
⑬	Steel profiles with corrosion protection
⑭	Aluminum sheet, edged

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.