


Thermally separated ceiling connector

Wooden balcony, cantilevered Wall with thermal insulation composite system Detailed view above door | under window with blinds

DCIK 37-04-TFJ | M 1 : 10

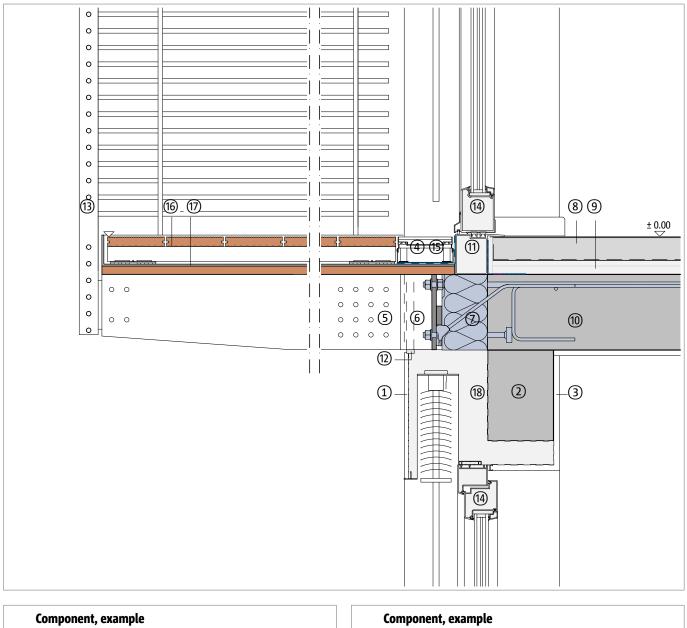

Component, example		Component, example
Thermal insulation composite system	10	Reinforced concrete ceiling
Reinforced concrete lintel	(1)	Threshold, thermally insulated
Interior plaster	12	Plastering profile, joint sealing tape
Insulation	(13)	Railing
Wooden beams (e.g., laminated timber)	(14)	Window element, door element
Head plate with cleat and blades, galvanized	15	Facade channel
Schöck Isokorb® XT type SK	16	Wooden floorboards, substructure, support system
Floor covering, floating screed	17	Aluminum tray, on wooden formwork
Impact sound and thermal insulation	(18)	Blinds, thermally insulated box
	Thermal insulation composite system Reinforced concrete lintel Interior plaster Insulation Wooden beams (e.g., laminated timber) Head plate with cleat and blades, galvanized Schöck Isokorb® XT type SK Floor covering, floating screed	Thermal insulation composite system(1)Reinforced concrete lintel(1)Interior plaster(1)Insulation(1)Wooden beams (e.g., laminated timber)(1)Head plate with cleat and blades, galvanized(1)Schöck Isokorb® XT type SK(16)Floor covering, floating screed(17)

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.