


Thermally separated ceiling connector

Wooden balcony, cantilevered

Monolithic masonry

Detailed view above door | below window

DCIK 38-02-TF | M 1 : 10

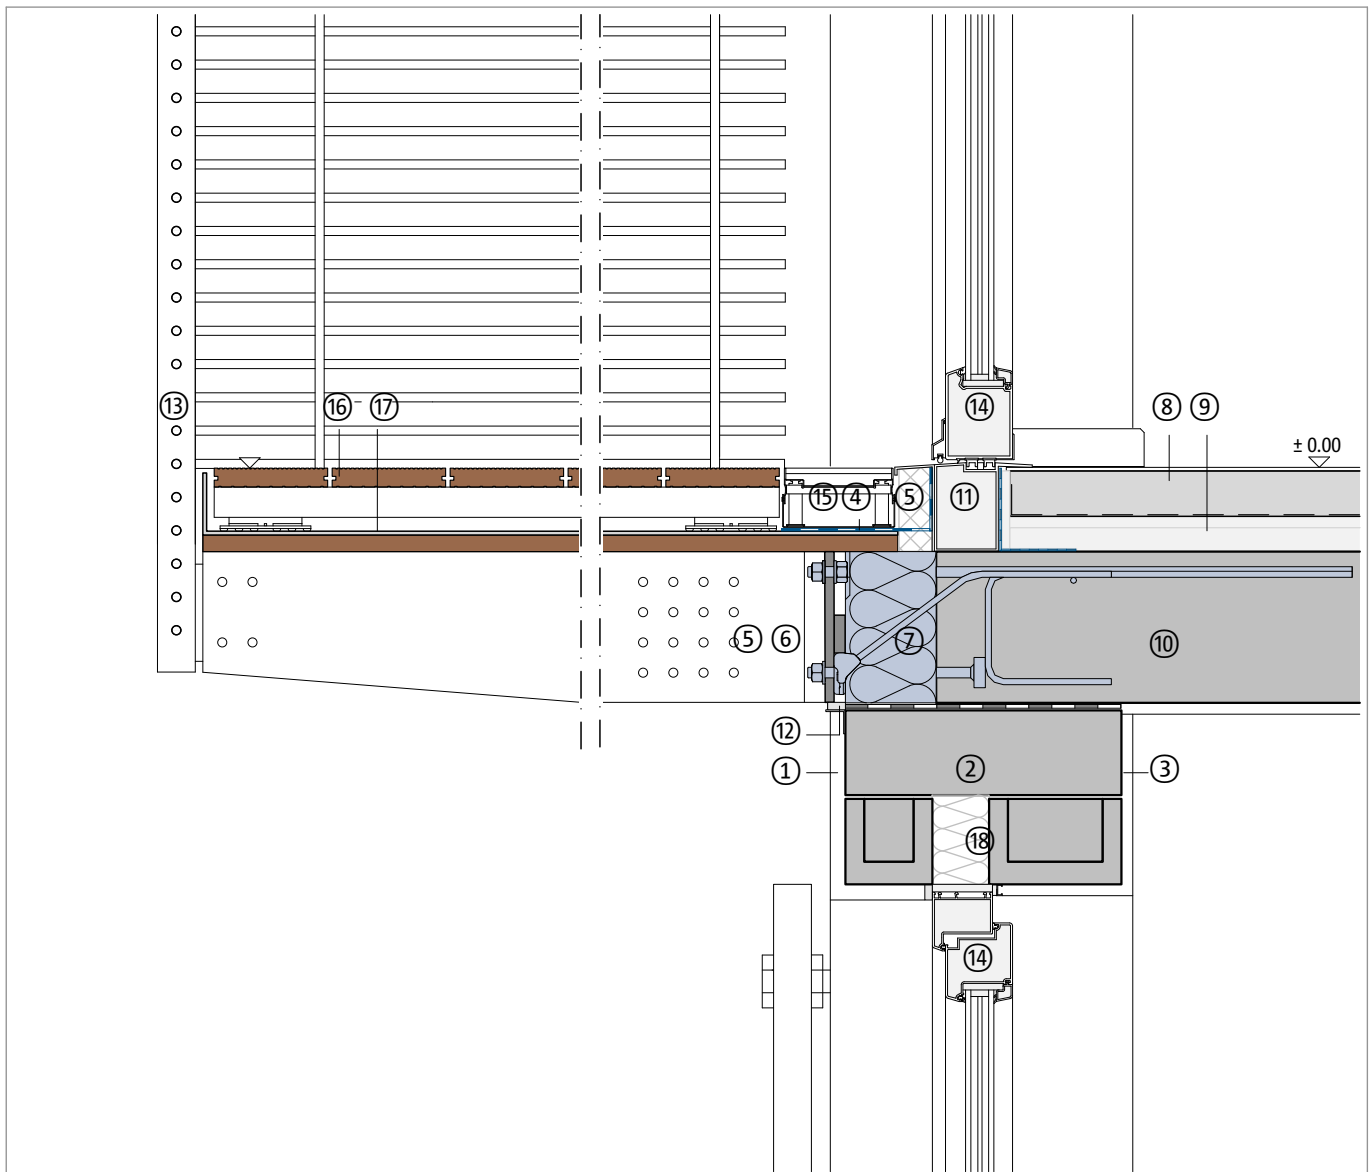

Component, example	
①	Exterior plaster
②	Masonry wall (e.g., insulating bricks)
③	Interior plaster
④	Insulation
⑤	Wooden beams (e.g., laminated timber)
⑥	Head plate with cleat
⑦	Schöck Isokorb® XT type SK
⑧	Floor covering, floating screed
⑨	Impact sound and thermal insulation

Component, example	
⑩	Reinforced concrete ceiling
⑪	Threshold, thermally insulated
⑫	Plastering profile or elastic joint
⑬	Railing
⑭	Window element, door element
⑮	Facade channel
⑯	Wooden floorboards, substructure, support system
⑰	Aluminum tray, on wooden formwork
⑱	Brick lintel, thermally separated

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.