


Thermally separated ceiling connector

Wooden balcony, cantilevered Monolithic masonry Detailed view above door | under window with blinds

DCIK 38-04-TFJ | M 1 : 10

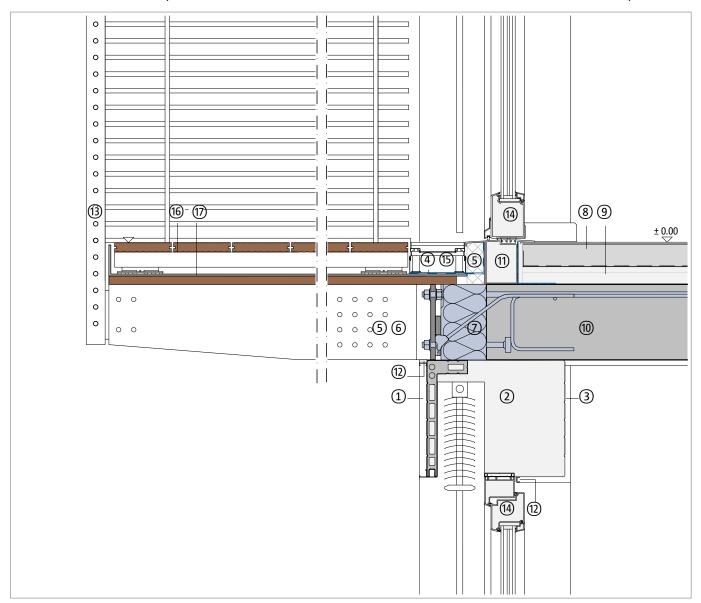

	Component, example
1	Exterior plaster
2	Blinds, thermally insulated box
3	Interior plaster
4	Insulation
(5)	Wooden beams (e.g., laminated timber)
6	Head plate with cleat
7	Schöck Isokorb® XT type SK
8	Floor covering, floating screed
9	Impact sound and thermal insulation

	Component, example
10	Reinforced concrete ceiling
11)	Threshold, thermally insulated
12)	Plastering profile or elastic joint
13)	Railing
14)	Window element, door element
(15)	Facade channel
16	Wooden floorboards, substructure, support system
17)	Aluminum tray, on wooden formwork

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.