


Thermally separated ceiling connector

Precast reinforced concrete panel or cornice Double-wall masonry Detailed view of cornice | Roof edge structure

DCIK 44-01-KGD | M 1:10

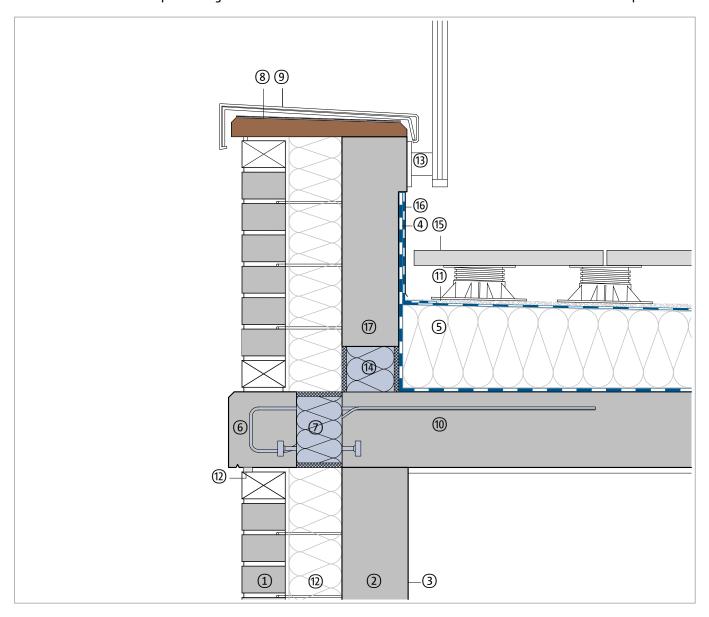

	Component, example
1	Exposed brickwork, clinker
2	Masonry wall or reinforced concrete wall
3	Interior plaster
4	Insulation
(5)	Sloping insulation
6	Panel, precast reinforced concrete
7	Schöck Isokorb® XT type O
8	Plank, multi-layer wood
9	Fascia cover, brackets, butt connectors

	Component, example
100	Reinforced concrete ceiling
11)	Protective fleece
12	Elastic joint
(13)	Railing, optional
14)	Schöck Isokorb® CXT type A or type A part Z
(15)	Slab, elevated
16	Aluminum sheet, edged
17)	Fascia, precast reinforced concrete
18)	Thermal insulation, mineral wool

Note: This detailed view is a general, non-binding planning proposal which only provides a schematic overview of the construction work. The planner and processor are responsible for checking applicability and completeness for each construction project. Adjacent components are only shown schematically. All specifications and assumptions must be adapted or coordinated to local conditions. The respective technical specifications of the data sheets, processing guidelines, standards, and system approvals must be observed. Balconies, arcades, and canopies require their own statics.