

Prohlášení o vlastnostech č.: DOP_IL_ETA-17-0773_v3_CZ

1. Jedinečný identifikační kód typu výrobku:

Schöck Isolink® typ C pro vícevrstvé betonové stěnové panely

2. Zamýšlené použití:

Kotvy z plastu zpevněného skleněnými vlákny (sklolaminát) pro použití v sendvičových a poloprefabrikovaných dvojítech stěnách z betonu

3. Výrobce:

Schöck Bauteile GmbH, Schöckstraße 1, D-76534 Baden-Baden

4. Systém nebo systémy pro posuzování a ověřování stálosti vlastností výrobku:

Systém 2+

5. Technické posouzení:

Evropský dokument pro posuzování / harmonizovaná norma / národní norma:

EAD 330387-00-0601, vydání 02/2023

Evropské technické posouzení / schválení:

ETA-17/0773, vydané dne 27. října 2023

Subjekt pro technické posuzování / schvalovací orgán:

Deutsches Institut für Bautechnik (DIBt), Kolonnenstr. 30B, D-10829 Berlin

Oznámený subjekt / kontrolní orgán v roli třetí strany:

IFBT GmbH – Institut für Fassaden- und Befestigungstechnik, Lipsko
NB 1109

6. Deklarovaná vlastnost / deklarované vlastnosti:

Základní charakteristiky	Vlastnost
Únosnost sklolaminátu v tlaku	Viz příloha C1
Únosnost betonu v tlaku	Viz příloha C1
Únosnost sklolaminátu v tahu	Viz příloha C1
Únosnost betonu v tahu	Viz příloha C1
Únosnost sklolaminátu ve smyku	Viz příloha C1
Únosnost betonu ve smyku	Viz příloha C1
Maximální dovolené přetvoření v příčném směru	Viz příloha C1
Minimální osově vzdálenosti a vzdálenosti od okraje	Viz příloha B2
E-modul	Viz příloha B2
Geometrické charakteristické hodnoty	Viz příloha B2

7. Příslušná technická dokumentace a/nebo specifická technická dokumentace:

Technická dokumentace k Evropskému technickému posouzení Schöck Isolink® typ C pro vícevrstvé betonové stěnové panely – je uložena v německém ústavu DIBt.

Vlastnosti výše uvedeného výrobku jsou ve shodě se souborem deklarovaných vlastností. Toto prohlášení o vlastnostech se v souladu s nařízením (EU) č. 305/2011 vydává na výhradní odpovědnost výrobce uvedeného výše. Podepsáno za výrobce a jeho jménem:

Baden-Baden, 15.11.2023

(místo, datum)



(Dr.-Ing. Niklas Puttendörfer, Head of R&D)

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-17/0773
of 27 October 2023

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Trade name of the construction product

Product family
to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment
contains

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

This version replaces

Deutsches Institut für Bautechnik

Schöck Isolink type C for multi-layer concrete panels

Glass fibre reinforced plastics connectors for use in
sandwich and element walls made of concrete

Schöck Bauteile GmbH
Schöckstraße 1
76534 Baden-Baden

Schöck Werk
Ringstraße 2
06188 Landsberg

15 pages including 3 annexes which form an integral part
of this assessment

330387-00-0601, Edition 02/2023

ETA-17/0773 issued on 21 December 2020

European Technical Assessment

ETA-17/0773

English translation prepared by DIBt

Page 2 of 15 | 27 October 2023

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Schöck Isolink type C with nominal diameter of 12 mm is an anchor which consists of a glass fibre reinforce plastic bar. The anchor has a profile in the shape of a trapezoidal thread with a profile depth of 0,60 to 0,75 mm and a pitch of 8 mm. The ends of the anchor are inclined.

The anchor is embedded on both sides in the concrete. It is orientated perpendicular to the wall. The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the GFRP connector is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the GFRP connector of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Resistance to GFRP failure under compression load	See Annex C1
Resistance to concrete failure under compression load	See Annex C1
Resistance to GFRP failure under tension load	See Annex C1
Resistance to concrete failure (cracked and uncracked concrete) under tension load	See Annex C1
Resistance to GFRP failure under shear load	See Annex C1
Resistance to concrete failure under shear load	See Annex C1
Maximum acceptable shear deformation	See Annex C1
Minimum edge distances and spacing	See Annex B2
Modulus of Elasticity	See Annex B2
Geometric parameters	See Annex B2

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330387-00-0601, the applicable European legal act is: [2000/273/EC].

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 27 October 2023 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Müller

Element wall with
Schöck Isolink® Type C

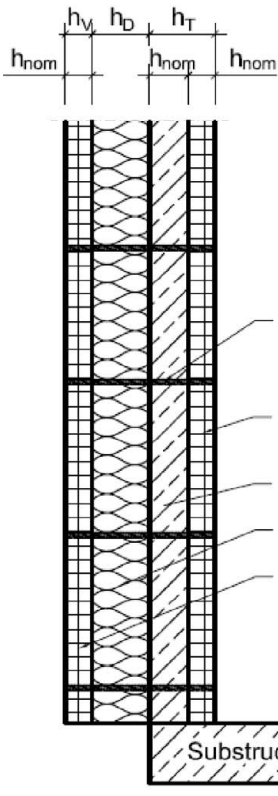

Sandwich wall with
Schöck Isolink® Type C


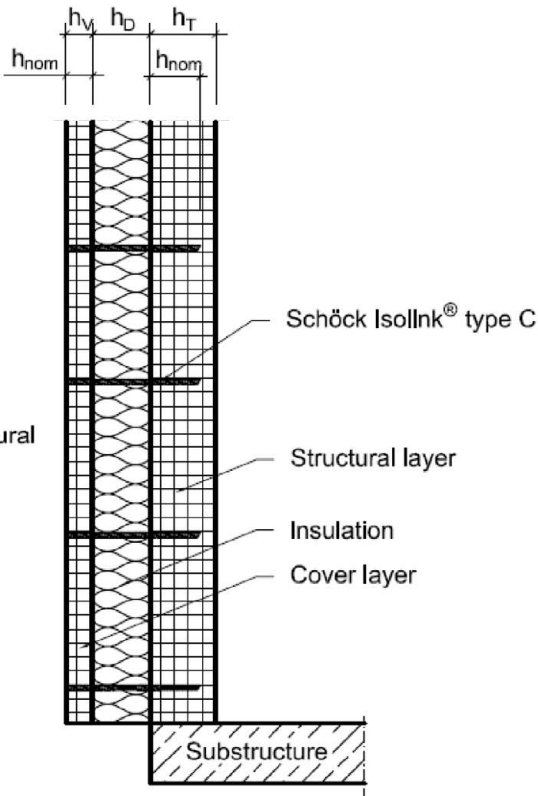



Fig. 1: Schöck Isolink® type C
Wall with non-supported cover layer

Schöck Isolink® type C can be used in the version type C-SH as well as type C-EH

Detail Schöck Isolink® in cover layer



Isolink® Typ C-EH




Isolink® Typ C-SH

Schöck Isolink® for multi-layer concrete panels

Product description
Installed condition with Schöck Isolink® Type C-EH and Type C-SH

Annex A1

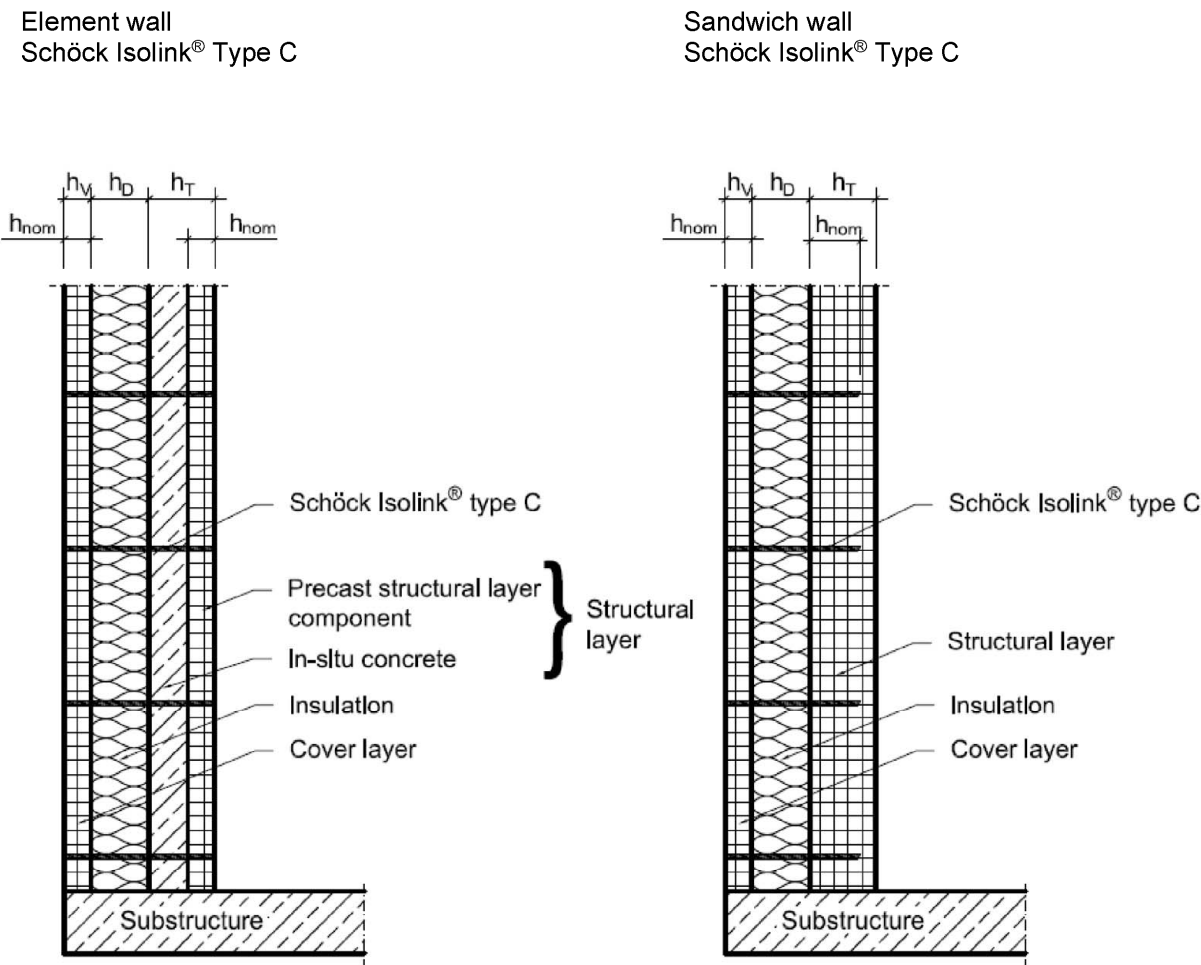

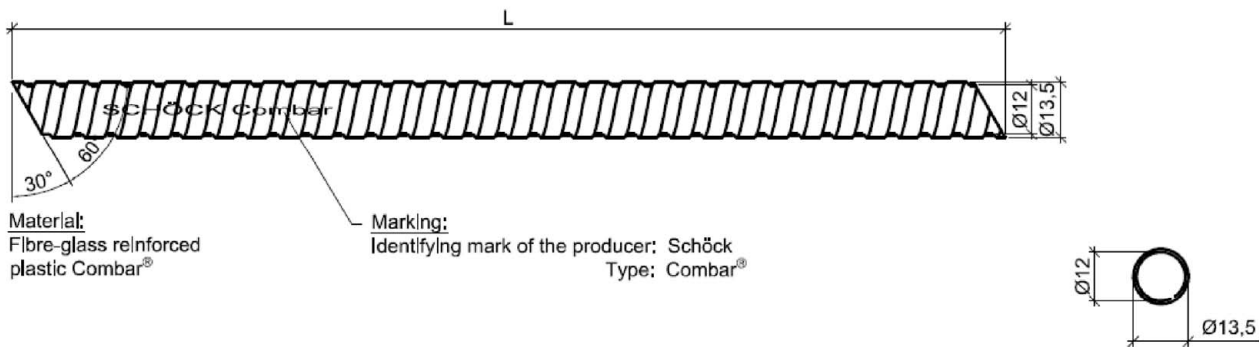


Fig. 3: Schöck Isolink® type C-EH

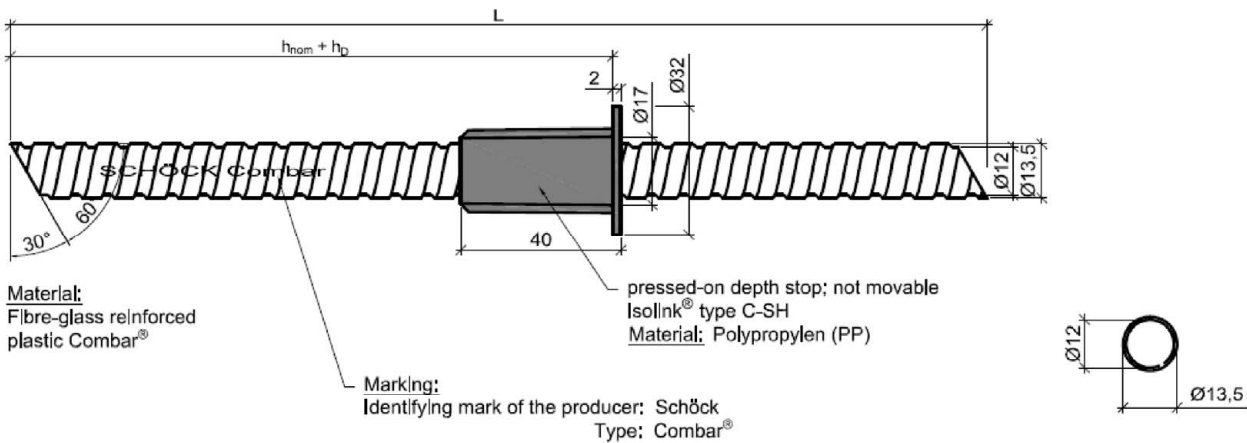


Fig. 4: Schöck Isolink® type C-SH

Schöck Isolink® for multi-layer concrete panels	Annex A3
Product description Material and dimensions	

Specifications for intended use

B.1 Connectors subject to:

- Static and quasi-static tension, compression and shear.

B.1.1 Base materials

- Compacted reinforced normal-weight concrete without fibres according to EN 206:2013 + A2:2001.
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A2:2021
- Cracked or uncracked concrete

B.1.2 Use conditions (Environmental conditions)

- The connector is intended to be used with a temperature on the surface of the concrete cover layer between +65 °C and -20 °C (maximum short-term temperature of +65 °C and maximum long-term temperature of 40°C).

B.1.3 Design

- Connectors are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The positions of the connectors are indicated on the design drawings (e.g. position of the connector relative to the reinforcement or to supports).
- The connectors are intended to be used for design analogous to EN 1992-4:2018.
- The actual shear deformation is limited to the maximum acceptable shear deformation according Annex C1.

B.1.4 Installation requirements

- The installation of the connectors is carried out by appropriately qualified personnel under the supervision of the person responsible for the technical matters on site.
- Use of the connector as supplied by the manufacturer only – without manipulations or repositioning.
- Installation in accordance with the manufacturer's specifications given in Annex B4 to B7.

Schöck Isolink® for multi-layer concrete panels

Intended use
Specifications

Annex B1

Table B.1: Installation parameters and layer thickness

Description	Abbreviation / Unit	Value	
Overall embedment depth of the anchor in concrete	h_{nom} [mm]	≥ 40	
Minimum thickness of cover layer	$h_{v,min}$ [mm]	40	
Minimum thickness of insulation	$h_{D,min}$ [mm]	60	
Maximum thickness of insulation	$h_{D,max}$ [mm]	350 ¹⁾	
Minimum thickness of structural layer	Element wall	40 (PC)	140 (In-situ concrete and PC)
	Sandwich wall	70	
	$h_{T,min}$ [mm]		

¹⁾ For shear $h_{D,max} = 140\text{mm}$

Table B.2: Calculation values for connector Schöck Isolink®

Description	Abbreviation / Unit	Value
Nominal diameter	d [mm]	12
Nominal cross section	A [mm ²]	113
Area moment of inertia in y and z direction	I_y, I_z [mm ⁴]	1161
Modulus of elasticity for tension / compression	E_N [N/mm ²]	60000
Modulus of elasticity for bending	E_M [N/mm ²]	60000


Table B.3: Minimum edge distances and spacing

Description	Abbreviation / Unit	Overall embedment depth of the anchor in concrete h_{nom}		
		40 mm	60 mm	100 mm
Minimum spacing ($=3,0 h_{nom}$)	s_{min} [mm]	120	180	300
Minimum edge spacing ($=1,5 h_{nom}$)	c_{min} [mm]	60	90	150

Schöck Isolink® for multi-layer concrete panels

Intended use
Installation parameters

Annex B2

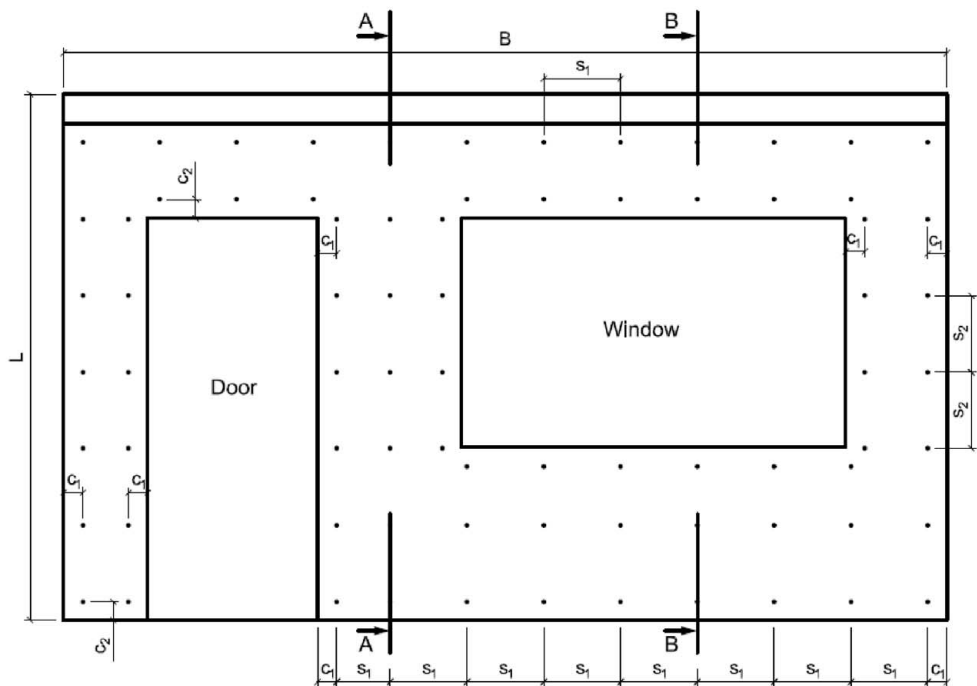

- Arrangement of Schöck Isolink® in a grid accordance with structural calculations.

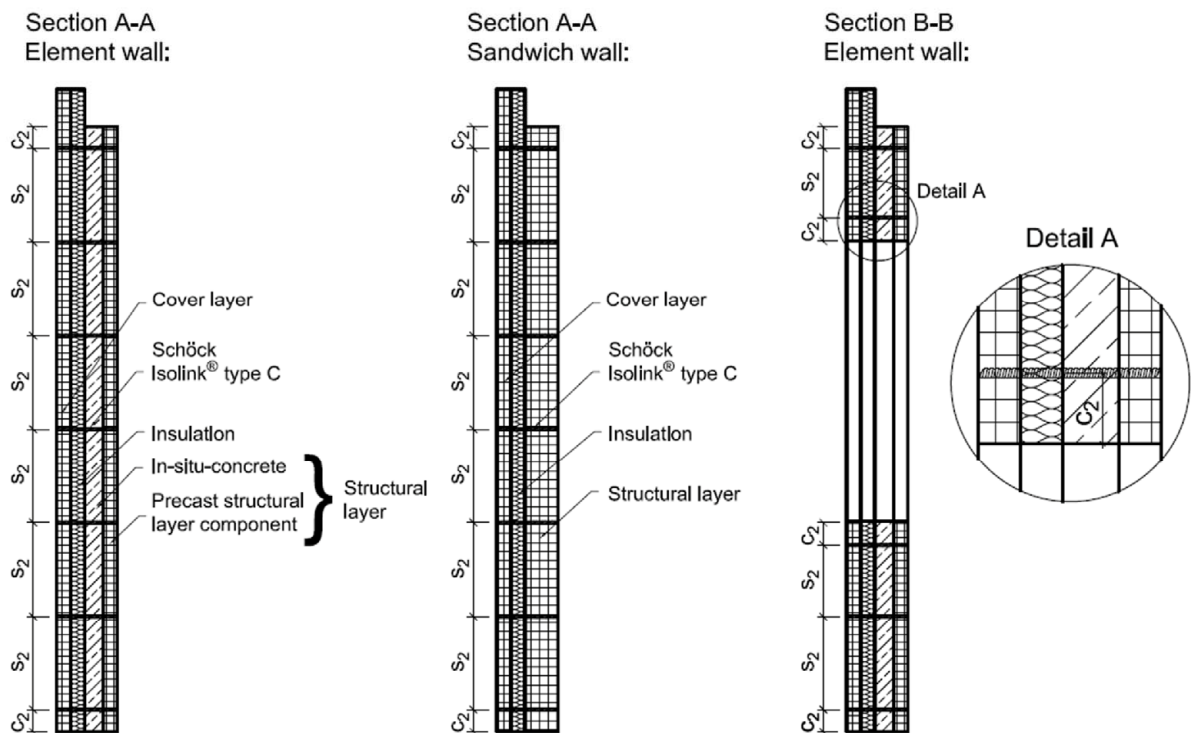


Fig. 5: Example of view of precast wall cover layer
(Installation parameters and layer thickness in accordance with Annex B2)

Schöck Isolink® for multi-layer concrete panels

Intended use
Example of wall with connectors

Annex B3

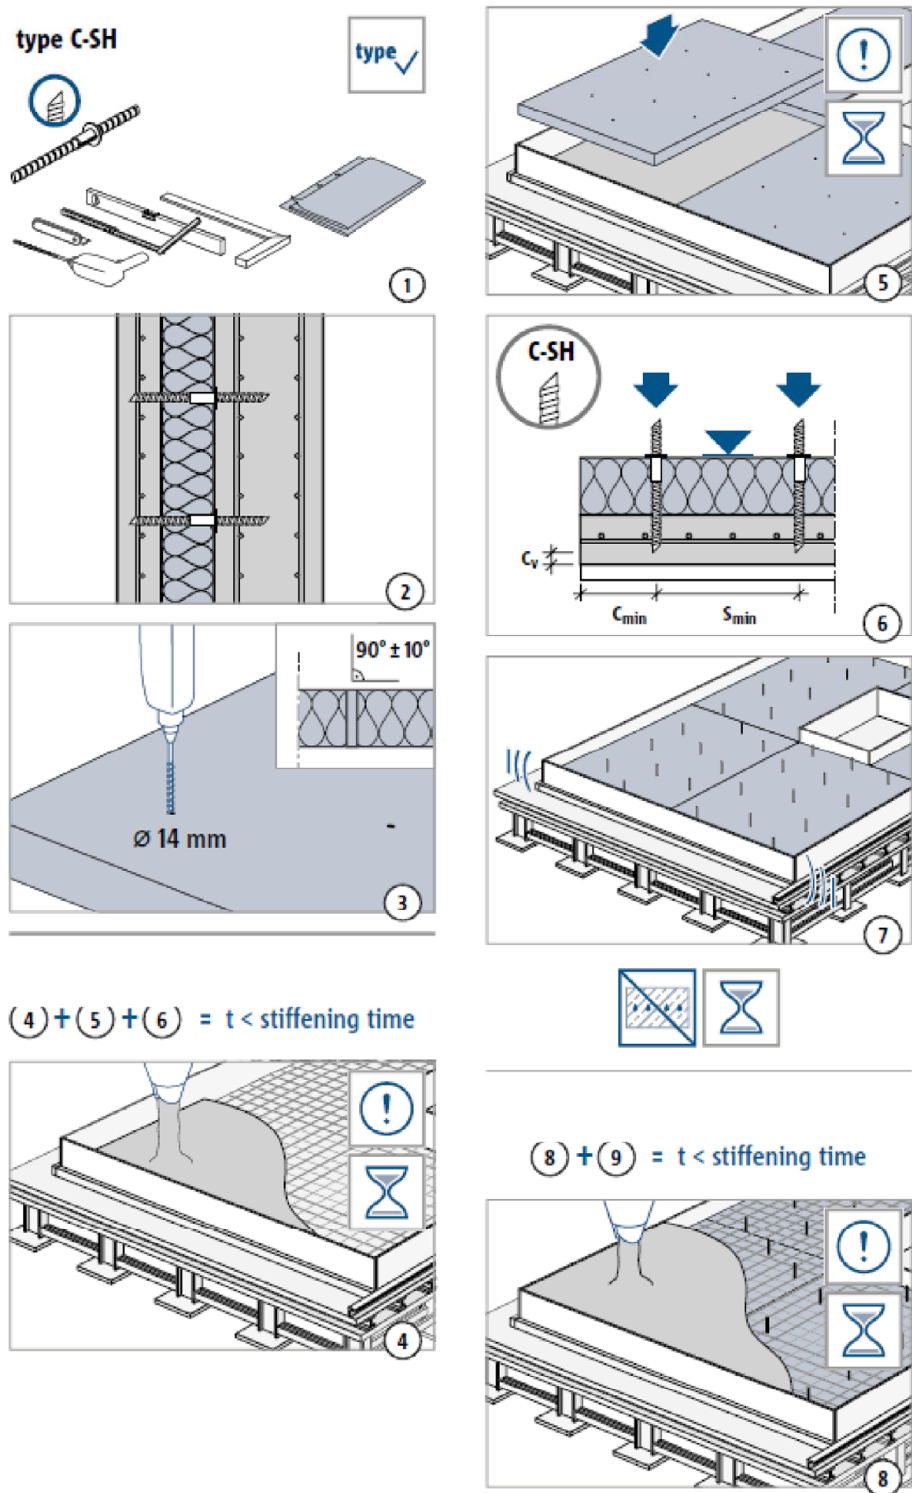


Fig. 6: Installation instruction - Schöck Isolink® for sandwich wall – page 1

Schöck Isolink® for multi-layer concrete panels

Intended use
Installation instruction sandwich wall, type C-SH

Annex B4

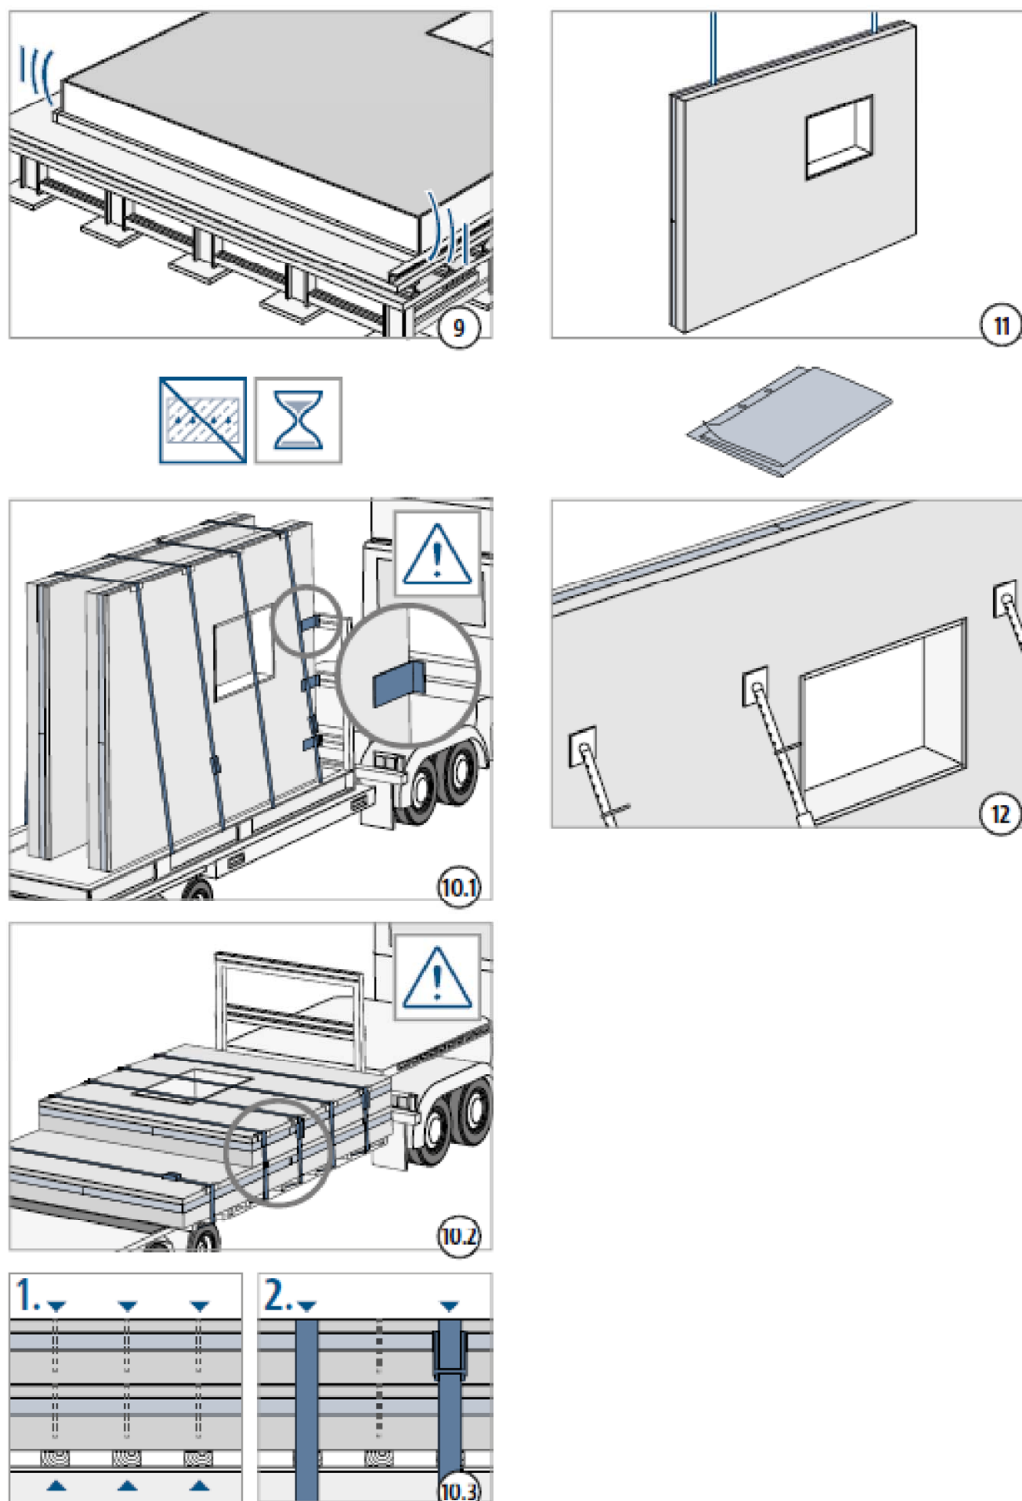


Fig. 7: Installation instruction - Schöck Isolink® for sandwich wall – page 2

Schöck Isolink® for multi-layer concrete panels

Intended use

Installation instruction sandwich wall, type C-SH

Annex B5

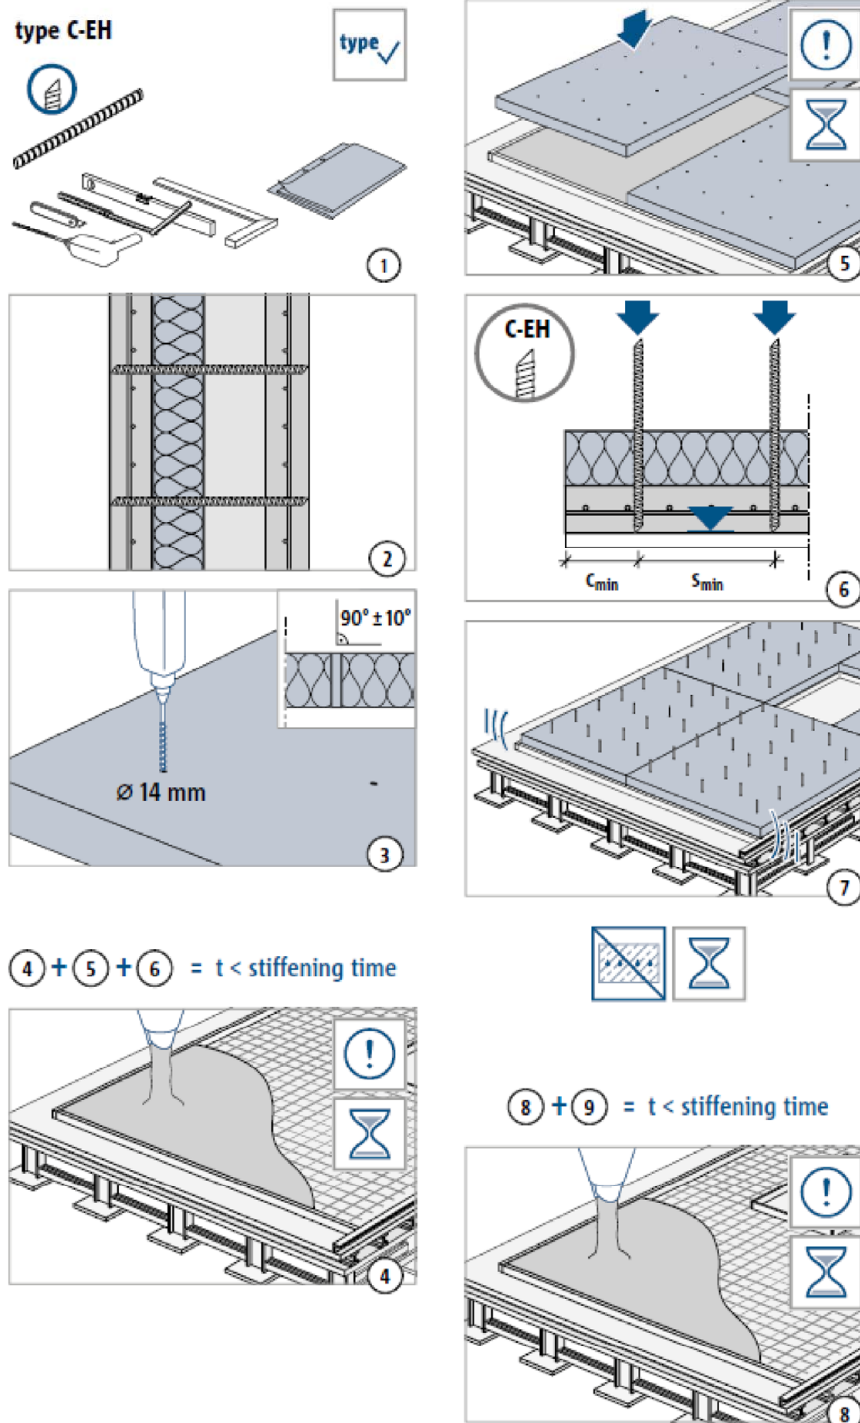


Fig. 8: Installation instruction - Schöck Isolink® for element wall – page 1

Schöck Isolink® for multi-layer concrete panels

Intended use

Installation instruction element wall, type C-EH

Annex B6

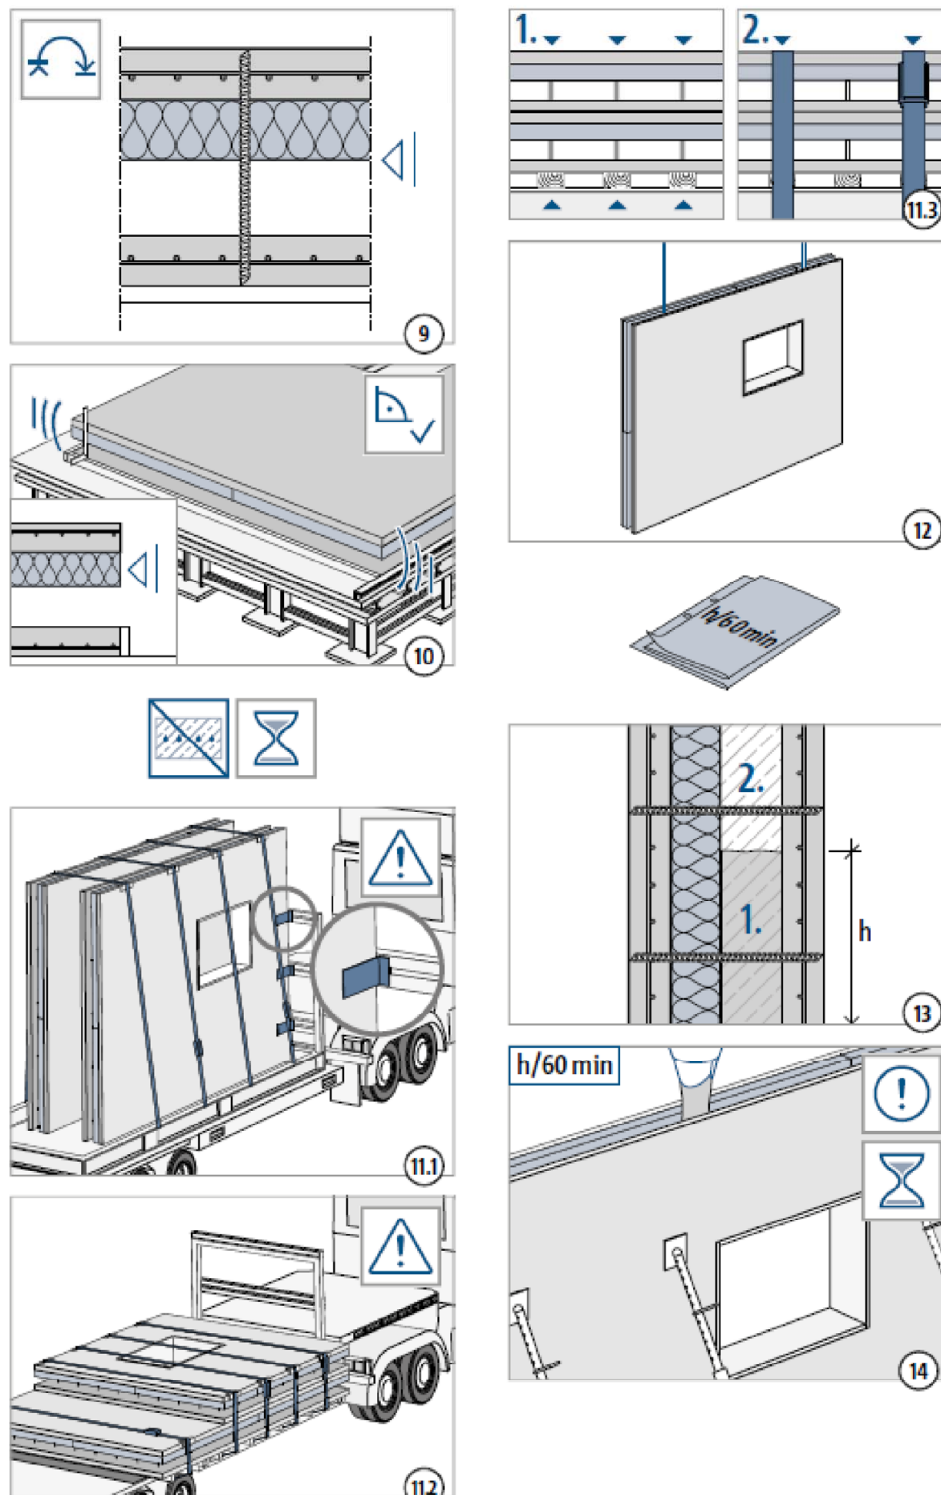


Fig. 9: Installation instruction - Schöck Isolink® for element wall – page 2

Schöck Isolink® for multi-layer concrete panels

Intended use

Installation instruction element wall, type C-EH

Annex B7

Table C.4: Characteristic resistance under tension, compression or shear and acceptable shear deformation

Essential characteristic	Abbreviation	Strength class	Thickness of insulation h_D	Overall embedment depth of the anchor in concrete h_{nom}		
				40 mm	60 mm	100 mm
Resistance to GFRP failure under compression load	$N_{Rk,GFRP,D}$	C20/25 to C50/60	250 mm	31,5 kN		
			350 mm	17,2 kN		
Resistance to concrete failure under compression load	$N_{Rk,c,D}$	C20/25 to C50/60	60 mm to 350 mm	6,5 kN	20,4 kN	
Resistance to GFRP failure under tension load	$N_{Rk,GFRP}$	C20/25 to C50/60	60 mm to 350 mm	8,5 kN	14,9 kN	24,5 kN
Resistance to concrete failure under tension load (uncracked concrete)	$N_{Rk,c,ucr}$	C20/25	60 mm to 350 mm	6,6 kN	11,2 kN	25,5 kN
		C50/60		9,9 kN	19,0 kN	42,4 kN
Resistance to concrete failure under tension load (cracked concrete)	$N_{Rk,c,cr}$	C20/25	60 mm to 350 mm	3,2 kN	6,1 kN	16,5 kN
		C50/60		4,6 kN	13,3 kN	20,7 kN
Resistance to GFRP failure under shear load	$V_{Rk,GFRP}$	C20/25 to C50/60	60 mm	2,5 kN		
			140 mm	1,5 kN		
Resistance to concrete failure under shear load (cracked concrete)	$V_{Rk,c}$	C20/25 to C50/60	60 mm to 350 mm	3,4 kN		
Maximum acceptable shear deformation	w_{max}	C20/25 to C50/60	60 mm	2,0 mm		
			100 mm	5,0 mm		

Schöck Isolink® for multi-layer concrete panels

Performance
Characteristic resistances and acceptable shear deformation

Annex C1